
# inspiration









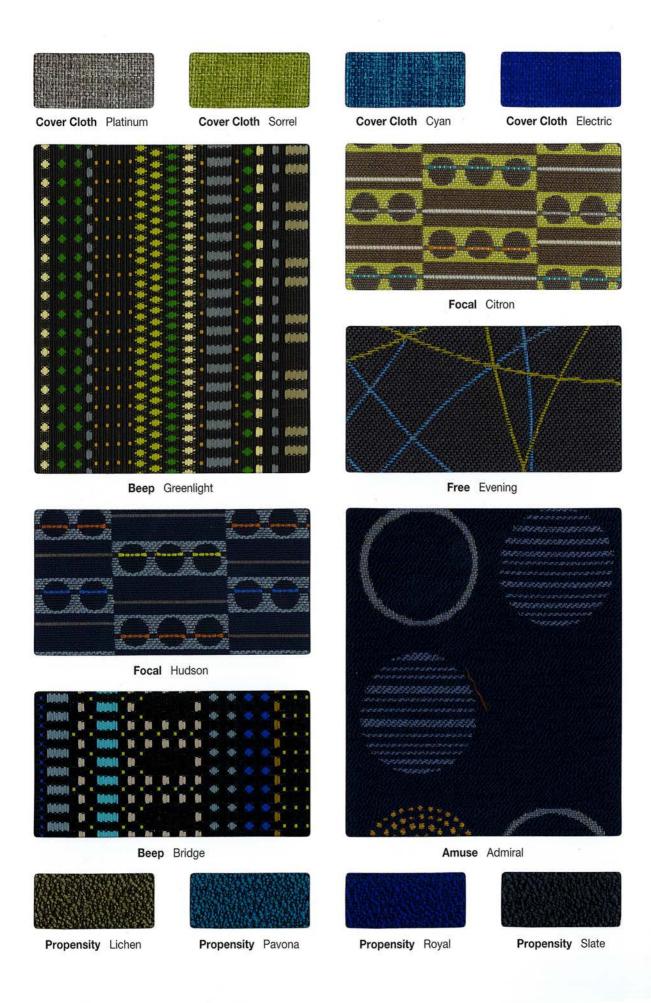

Width - Pattern	Fiber Content & Backing	Finish	Abrasion (D.R.)	Light- fastness	Approx. Repeats	Cleaning Code	Grade
56" AMUSE 4.四. **. 化大·	61% Post Consumer Recycled Polyester, 39% Polyester Acrylic Backing	Soil and Stain Resistant	50,000	40 Hrs. Class 4	6 1/8" L, 7 1/2" W	ws	D
54" BEEP 从风 ** 《 大 *	50% Post Consumer Recycled Polyester, 50% Polyester Acrylic Backing	Soil and Stain Resistant	70,000	40 Hrs. Class 4	%" L, 15" W Shown Railraoded	WS	D
59" COVER CLOTH 《风樂.《太·	100% Polyester	Crypton®	200,000	40 Hrs. Class 4		W	D
54" FOCAL 从四. **. 必. 六. *	57% Post Consumer Recycled Polyester, 43% Polyester Acrylic Backing	Soil and Stain Resistant	60,000	40 Hrs. Class 4.5	4 ½" L, 2 %" W	ws	D
57" FREE 从囚.兼. €. 太.*	100% Post Consumer Recycled Polyester Acrylic Backing	Soil and Stain Resistant	100,000	40 Hrs. Class 4	5 %" L, 5" W	ws	С
54" PROPENSITY 此及兼《大·	76% Polyester, 24% Post Consumer Recycled Polyester Acrylic Backing	Soil and Stain Resistant	100,000	40 Hrs. Class 4.5		ws	С

<sup>\*</sup>ACT® Registered Certification Marks

### EXPLANATION OF ACT ICONS FOR UPHOLSTERY

#### FIRE RETARDANCY

Flammability testing determined as fabric's resistance to burning.



PASSES California 117 2013

# COLORFASTNESS TO WET & DRY CROCKING

Colorfastness to wet & dry crocking refers to the rubbing off of color from the fabric onto clothing, hands or other materials and can occur under wet or dry conditions.



AATCC 8-1974 Dry Crocking, Class 4 minimum; Wet Crocking, Class 3 minimum

## COLORFASTNESS TO LIGHT

Colorfastness to light is the degree to which fabric will retain its color when exposed to light.



AATCC 16A-1974 or AATCC 16E-1976; Class 4 minimum at 40 hours NOTE: Class 4 minimum at 60 hours is recommended for direct sunlight exposure situations

# PHYSICAL PROPERTIES

3 physical property tests include: brush pill test to determine a fabric's pilling. Breaking/tensile strength is the ability of a fabric to withstand tension without breaking or tearing. Seam slippage is the pulling apart of fabrics at the seams.



PASSES

Brush Pill ASTM D3511, 3-4 minimum
Breaking Strength ASTM D3597-D1682-64 (1975) 50 lbs. minimum in warp & weft
Seam Slippage ASTM D3597-D434-75 25 lbs. minimum in warp & weft

For memo samples please contact,

#### ABRASION

Abrasion is the ability of a fabric to withstand damage from wear and rubbing. There is a general contract specification as well as a heavy duty specification.



General Contract

ASTM 3597 modified (#10 cotton duck); 15,000 double rubs Wyzenbeek Method



Heavy Duty ASTM 3597 modified (#10 cotton duck); 30,000 double rubs Wyzenbeek Method or ASTM D4966 (with 21 oz. weight); 40,000 rubs Martindale Method

#### CLEANING CODE DEFINITIONS

WS: Water-based cleaning agents or foam.

W: Water-based foam or cleaner.







9 to 5 Seating 3211 Jack Northrop Ave. Hawthorne, CA 90250 Tel: 888.925.SEAT --> 888.925.7328 Fax: 866.925.SEAT --> 866.925.7328