



## Environmental Information and LEED® Summary

PHONE 310.220.2500 FAX 310.220.2501 ADDRESS 3211 Jack Northrop Avenue Hawthorne, CA 90250  
 www.9to5seating.com sales@9to5seating.com

Product: Precept Low-Back (model: 1725)  
 Manufacturer: 9to5 Seating



### Material Content Description

Material	Percent by Weight	Recycled Content <sup>1</sup>	End of Life Management
Metal: steel, rod, tubing, cold/hot rolled flat stock	26%	60% PC	Recycle where possible
Wood: plywood, wood parts	18%	0% From Rapidly Renewable Forests	Recycle where possible
Foam: Polyurethane	16%	0%	Recycle where possible
Fabric: Natural / Synthetic	6%	0% - 100% <sup>2</sup>	Recycle where possible
Plastic: Polypropylene, Nylon, ABS	22%	60% PC	Recycle where possible
Miscellaneous	12%	0%	Recycle where possible
	<b>Total Post Consumer Recycled Content</b>	28.8% to 34.8%	


PI = Post Industrial or Pre Consumer Recycled Content PC = Post Consumer Recycled Content

<sup>1</sup>Values are based on the recycled content of the total chair weight and the specific chair style

<sup>2</sup>Range based on specific fabric brand and type

#### Comments:

1. 9to5 Seating complies with the FTC's Guide for the Use of Environmental Marketing Claims.
2. 9to5 Seating encourages blanket-wrapped shipping - corrugated cartons are used for other modes.
3. Product recycling depends on local program.

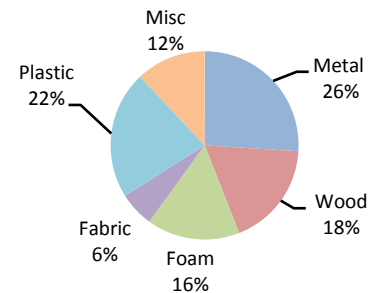

### Indoor Air Quality - GREENGUARD Certification

Good, clean, indoor air quality is critical to providing healthy environments for building occupants. People today spend as much as 90% of their time indoors. GREENGUARD Certification offers a way to keep pollutants out in the first place. Using products bearing the GREENGUARD Indoor Air Quality Certified® mark can rest easy knowing these products have been independently tested and meet one of the most rigorous chemical emission standards in the world. 9 to 5 Seating's GREENGUARD Certification makes them recommended by the U.S. Green Building Council's (USGBC) LEED® Rating System. We're proud of our certification and our commitment to the environment.

### LEED® 2009 Credit Information

Category	Credit	Contributes to
Materials and Resources	MR Credit 4: Recycled Content	1 -2 point(s)
Materials and Resources	MR Credit 5: Regional Materials *	1 -2 point(s)
Materials and Resources	MR Credit 6: Rapidly Renewable Materials **	1 point
Materials and Resources	MR Credit 7: Certified Wood **	1 point
Indoor Environment Quality	IEQ Credit 4.5: Low-emitting Materials ...Seating	1 point

\* Contribution to this credit is only applicable if a minimum 20% of the combined value of construction and Division 12 (Furniture) materials and products is used in a project within radius of 500 miles from the 9to5 Seating factory in Southern California.

\*\* Contribution to this credit not currently available from 9 to 5 Seating's products.



# CERTIFICATE OF COMPLIANCE



## 9 to 5 Seating Precept

Restrictions:

10909-420

Certificate Number

06/08/2010 - 06/08/2014

Certificate Period

Certified

Status

UL 2818 -2013 Standard for Chemical Emissions for Building Materials, Finishes and Furnishings

Product tested in accordance with UL 2821 test method to show compliance to emission limits on UL 2818. Section 7.1 and 7.2.

Commercial furniture and furnishings are tested in accordance with ANSI/BIFMA M7.1-2011 and determined to comply with ANSI/BIFMA X7.1-2011 and ANSI/BIFMA e3-2012 Credit 7.6.1, 7.6.2, and 7.6.3. Seating products are modeled in the seating environment. Products also determined compliant in accordance with California Department of Public Health (CDPH) Standard Method V1.1-2010.



**Environment**

## GREENGUARD Gold Certification Criteria for Office Furniture Seating

Criteria	CAS Number	Maximum Allowable Predicted Concentration	Units
TVOC <sup>(A)</sup>	-	0.22	mg/m <sup>3</sup>
Formaldehyde	50-00-0	4.5 (3.65 ppb)	µg/m <sup>3</sup>
Total Aldehydes <sup>(B)</sup>	-	0.043	ppm
4-Phenylcyclohexene	4994-16-5	6.5	µg/m <sup>3</sup>
1-Methyl-2-pyrrolidinone <sup>(C)</sup>	872-50-4	80	µg/m <sup>3</sup>
Individual VOCs <sup>(D)</sup>	-	1/4 CREL or 1/100th TLV	-

- (A) Defined to be the total response of measured VOCs falling within the C<sub>6</sub> – C<sub>16</sub> range, with responses calibrated to a toluene surrogate.
- (B) The sum of all measured normal aldehydes from formaldehyde through nonanal, plus benzaldehyde, individually calibrated to a compound specific standard. Heptanal through nonanal are measured via TD/GC/MS analysis and the remaining aldehydes are measured using HPLC/UV analysis.
- (C) Based on the CA Prop 65 Maximum Allowable Dose Level for inhalation of 3,200 µg/day and an inhalation rate of 20 m<sup>3</sup>/day.
- (D) Allowable levels for chemicals not listed are derived from the lower of 1/4 the California Office of Environmental Health Hazard Assessment (OEHHA) Chronic Reference Exposure Level (CREL) as required per the CDPH/EHLB/Standard Method v1.1 and BIFMA level credit 7.6.2 and 1/100th of the Threshold Limit Value (TLV) industrial work place standard (Reference: American Conference of Government Industrial Hygienists, 6500 Glenway, Building D-7, and Cincinnati, OH 45211-4438).



**Environment**