


# inspiration



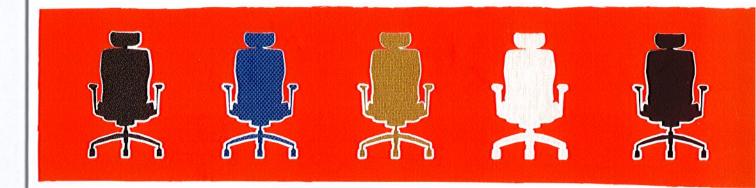


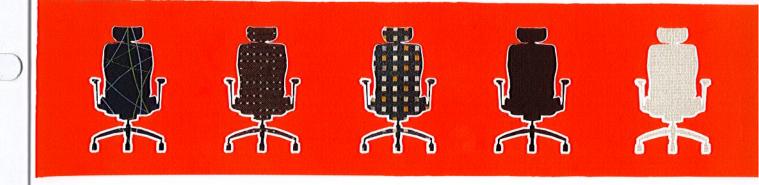


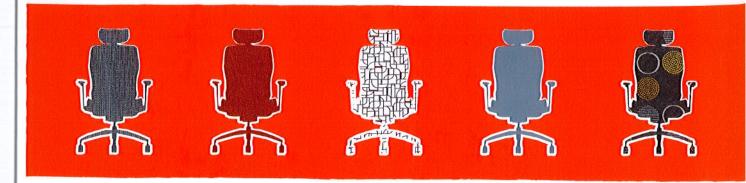

5 DAY QUICK SHIP



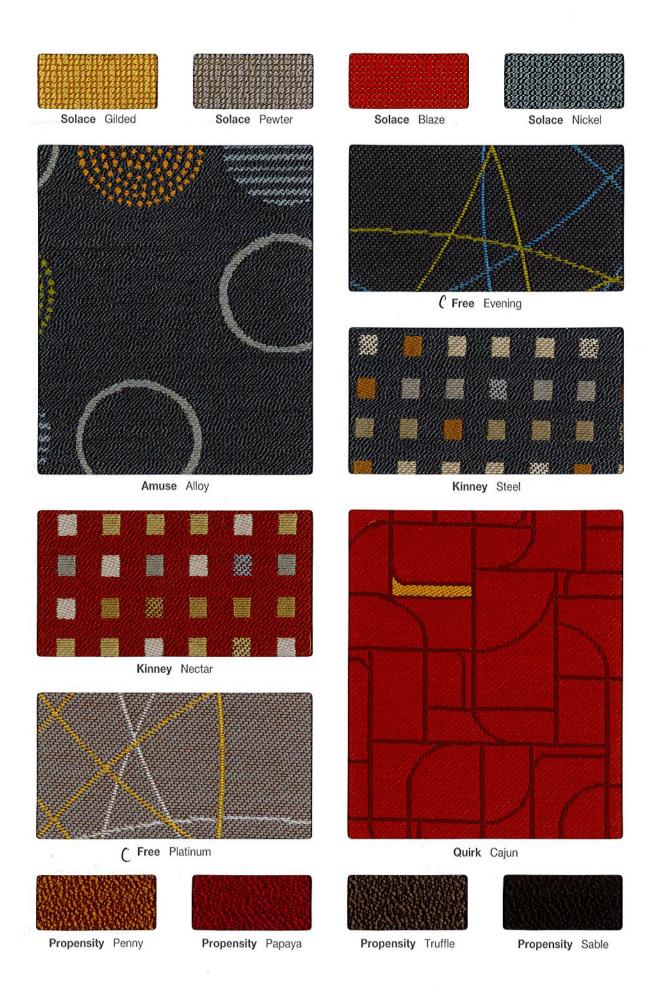

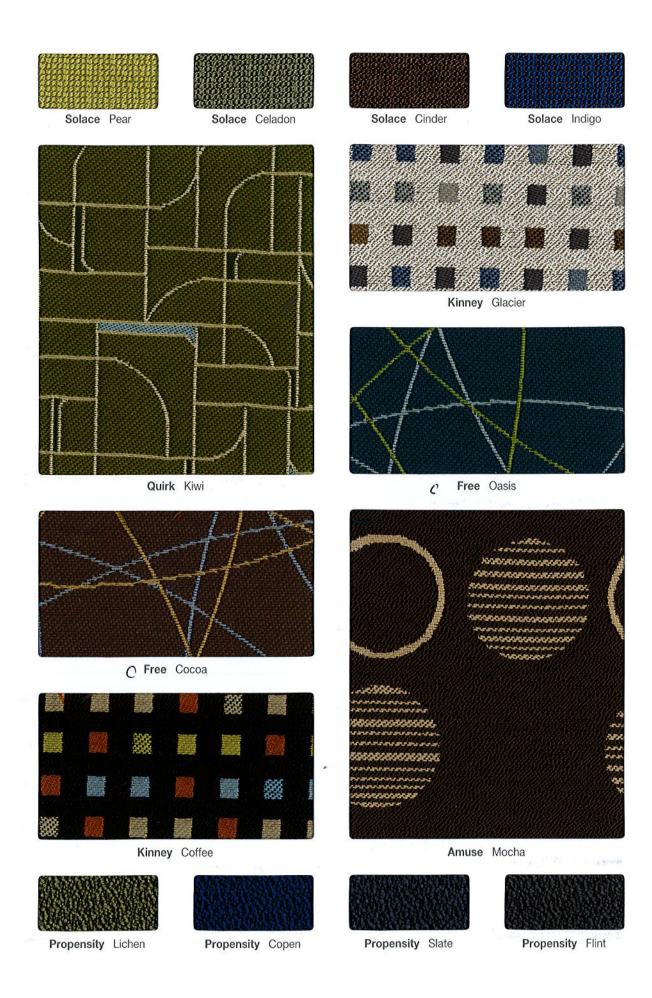

	Width - Pattern	Fiber Content & Backing	Finish	Abrasion (D.R.)	Light- fastness	Approx. Repeats	Cleaning Code	Grade
56"	-60 AMUSE - 4. ■ * . • ★ . •	61% Post Consumer Recycled Polyester, 39% Polyester Acrylic Backing	Soil and Stain Resistant	50,000	40 Hrs. Class 4	6 1/8" L, 7 1/2" W	WS	D
\$ <del>7</del> "	6 FREE N ■ * • ★・	100% Post Consumer Recycled Polyester Acrylic Backing	Soil and Stain Resistant	100,000	40 Hrs. Class 4	5 %" L, 5" W	WS	С
×	60° KINNEY	56% Post Consumer Recycled Polyester, 44% Polyester Acrylic Backing	Soil and Stain Resistant	100,000	40 Hrs. Class 4	5 %" L, 5" W	WS	D
V	54" PROPENSITY 从四. **. 必. 大.*	76% Polyester, 24% Post Consumer Recycled Polyester Acrylic Backing	Soil and Stain Resistant	100,000	40 Hrs. Class 4.5		WS	С
×	60" QUIRK 以及. **. @ 太 *	100% Post Consumer Recycled Polyester Acrylic Backing	Soil and Stain Resistant	50,000	40 Hrs. Class 4	6 ¼" L, 7 ¼" W	WS	D
Х	55" SOLACE	49% Polyester, 41% Post Industrial Recycled Polyester, 10% Post Consumer Recycled Polyester Acrylic Backing	Soil and Stain Resistant	100,000	40 Hrs. Class4		WS	D

<sup>\*</sup>ACT® Registered Certification Marks

### EXPLANATION OF ACT ICONS FOR UPHOLSTERY

## FIRE RETARDANCY

Flammability testing determined as fabric's resistance to burning.



PASSES California 117

## COLORFASTNESS TO WET & DRY CROCKING

Colorfastness to wet & dry crocking refers to the rubbing off of color from the fabric onto clothing, hands or other materials and can occur under wet or dry conditions.



PASSES

AATCC 8-1974 Dry Crocking, Class 4 minimum; Wet Crocking, Class 3 minimum

# COLORFASTNESS TO LIGHT

Colorfastness to light is the degree to which fabric will retain its color when exposed to light.



PASSES

NOTE: Class 4 minimum at 40 hours NOTE: Class 4 minimum at 40 hours NOTE: Class 4 minimum at 60 hours is recommended for direct sunlight exposure situations

## PHYSICAL PROPERTIES

3 physical property tests include: brush pill test to determine a fabric's pilling. Breaking/tensile strength is the ability of a fabric to withstand tension without breaking or tearing. Seam slippage is the pulling apart of fabrics at the seams.



PASSES

Brush Pill ASTM D3511, 3-4 minimum
Breaking Strength ASTM D3597-D1682-64 (1975) 50 lbs. minimum in warp & weft
Seam Slippage ASTM D3597-D434-75 25 lbs. minimum in warp & weft

For memo samples please contact.

#### MOMENTUM EXTILE

Toll Free 800-366-6839 memosamples.com

# ABRASION

Abrasion is the ability of a fabric to withstand damage from wear and rubbing. There is a general contract specification as well as a heavy duty specification.



General Contract ASTM 3597 modified (#10 cotton duck); 15,000 double rubs Wyzenbeek Method



Heavy Duty ASTM 3597 modified (#10 cotton duck); 30,000 double rubs Wyzenbeek Method or ASTM D4966 (with 21 oz. weight); 40,000 rubs Martindale Method

## CLEANING CODE DEFINITIONS

WS: Clean with water-based cleaning agents, foam or pure, water-free solvents (Energine, Carbona, Renuzit or other similar products). Vacuuming or light brushing is recommended to prevent dust and soil buildup





9 to 5 Seating 3211 Jack Northrop Ave. Hawthorne, CA 90250 Tel: 888.925.SEAT --> 888.925.7328 Fax: 866.925.SEAT --> 866.925.7328