

Impress the Senses

9to5[®]
seating




Ultraleather (ULO)




ULO Elephant

Wired (WI)

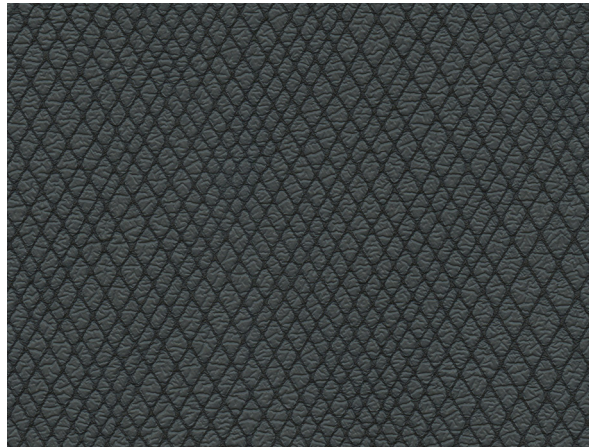


WI Blackjack

Brisa (BRO)

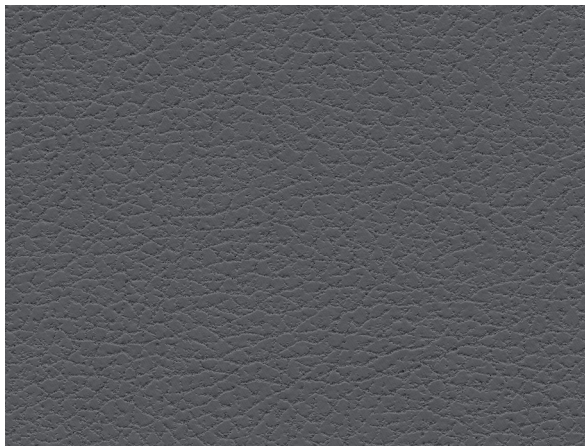


BRO Hazey

Ellora (EL)

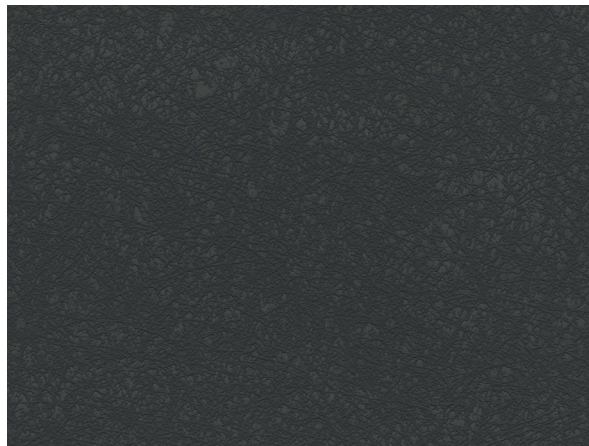


EL Black Crow

Tottori (TO)

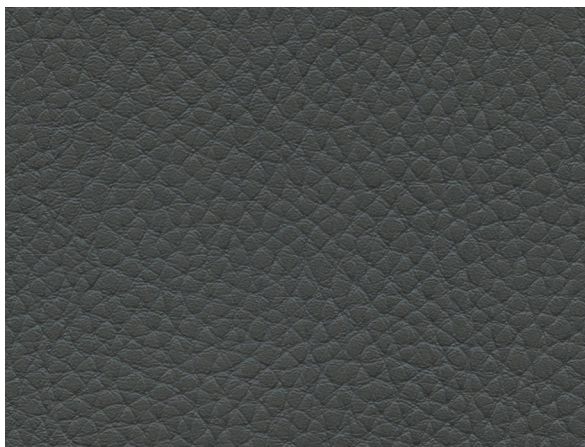

TO Classic Grey

Concept Pro (CP)

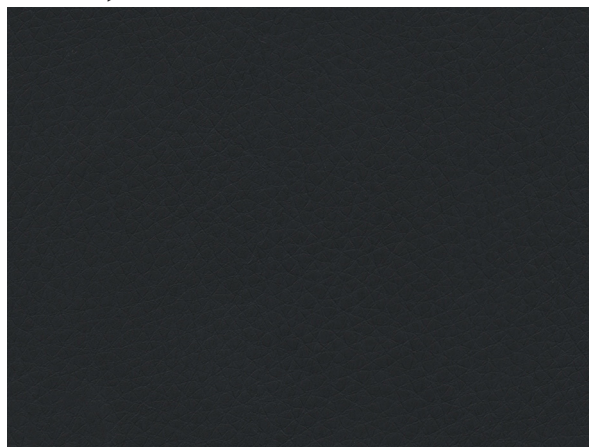

CP Black Eel




CP Frostline




ULO Classic Grey




ULO Citronella




BRO Ice Pink



BRO Sterling Blue



EL Cloud Green




BRO Clear Quartz



BRO Bone




CP Calendula



EL Rose Water




CP Air Blue



BRO Mineral



CP Lava Smoke




EL Soft Almond




BRO Caramel



CP Taffy



BRO Harbor Mist



WI Aquarius



BRO Ash



WI Butter Cookie




EL Roast Chestnut




BRO Pompeiian Red



BRO Cambridge Blue




ULO Emerald Isle




WI Dust



EL Coffee Cream




TO Ginseng




TO Rouge



ULO High Seas




CP Biscay Bay




EL Outerspace




ULO Papyrus




ULO Curry



EL Fine Wine




EL Navy Blazer




EL Icy Pear



ULO Flagstone



EL Granola




WI Marmalade




CP Red Cabbage




BRO Blue Sea




BRO Sage




BRO Wrought Iron



CP Lentil




EL Clay Pot



EL English Violet



ULO Bayou




EL Olive Drab




ULO Raven Wing




BRO Truffle




ULO Canyon Clay




WI Hale Navy




BRO Rising Tide




CP Lawn Green




BRO Black Onyx




ULO Fudge




ULO Earthenware



BRO Evening Blue



CP Ink Blue



TO Dark Spruce

Collection	Composition	Weight / Thickness	Repeat	Abrasion	Air Permeability / Sound Absorption	Grade
Ultraleather (ULO) Renewable Fibers	100% Polycarbonate Polyurethane Surface 100% Reinforced Rayon Backing	9.7 oz. per sq. yard Approx. 0.95 mm	N/A	ASTM D4157 400,000 DR Wyzenbeek	N/A	F
Brisa (BRO) Breathable Comfort Acoustics Recycled Water Bottles	100% Polycarbonate Polyurethane Surface 65% Recycled Polyester, 35% Rayon Backing	8.9 oz. per sq. yard Approx. 0.95 mm	N/A	ASTM D4157 300,000 DR Wyzenbeek	ASTM D737 / ASTM C423	F
Tottori (TO) Recycled Water Bottles	100% Polycarbonate Polyurethane Surface 65% Recycled Polyester, 35% Rayon Backing	12.4 oz. per sq. yard Approx. 1.1 mm	N/A	ASTM D4157 400,000 DR Wyzenbeek	N/A	F
Wired (WI) Recycled Water Bottles	100% Polycarbonate Polyurethane Surface 65% Recycled Polyester, 35% Rayon Backing	10.3 oz. per sq. yard Approx. 1.1 mm	27.55"V x 16.61"H	ASTM D4157 400,000 DR Wyzenbeek	N/A	F
Ellora (EL) Breathable Comfort Acoustics Recycled Water Bottles	100% Polycarbonate Polyurethane Surface 65% Recycled Polyester, 35% Rayon Backing	9.6 oz. per sq. yard Approx. 0.89 mm	N/A	ASTM D4157 300,000 DR Wyzenbeek	ASTM D737 / ASTM C423	F
Uf Select						
Concept Pro (CP) Ink and Stain Resistant†	Polycarbonate Blended Surface 65% Polyester, 35% Cotton	12.5 oz. per sq. yard Approx. 0.95 mm	N/A	ASTM D4157 250,000 DR Wyzenbeek	N/A	E

Width: 54"

Hydrolysis: 16 Weeks (Concept Pro 10 weeks)
ASTM D3690 SECT. 6.11 (Hydrolytic Stability) / ISO 1419 Method C (Accelerated Ageing)

F/R Rating: (FR Free) ASTM E84 (adhered) - Class A
CA TB 117-2013- Pass
FMVSS 302 - Pass
NFPA 260 - Class 1
UFAC - Class
AB 2998

Can be treated to meet FAR specifications. These fabrics, when treated and/or used with other compatible furniture components, have been shown to perform under the fire test conditions of ASTM E84 (unadhered)*, BS 5852 Source 0, 1 & 5 (Cig, Match and Crib 5), BS EN 1021 Parts 1 & 2 (Cig & Match) & IMO Part 8.

Adhesion of Coating: ASTM D751 **Tensile Strength:** BS EN ISO 1421

Tear Strength: ASTM D2261 **Colorfastness to Crocking:** AATCC 8, Grade 4-5 Wet & Dry

Breaking Strength: ASTM D5034 **Colorfastness to Light:** AATCC 16.3, 200 Hours, Grade 4
ISO 105 B02, Grade 6

*Removal of most denim dye may vary depending on the quality of dye and the period of time the stain sets in. Dye transfer is difficult to control, not always preventable, and may be irreversible. (Concept Pro Only)

Cleaning & Care

- Wipe up spills as soon as they occur
- Clean with soap and water
- Sanitize using disinfectants such as (5:1) water to bleach solution
- For stubborn stains, wipe off with isopropyl alcohol as soon as possible*
- Thoroughly rinse all solution residue with clean water
- Air dry

For more information on certifications and standards, sustainability, as well as in depth cleaning and care instructions, and to order memo samples, please visit www.ultrafabricsinc.com.

Ultrafabrics' collections meet or exceed ACT Voluntary Performance Guidelines.

Part of the Flokk Group



Seating for an evolving world.

9to5seating.com
3211 Jack Northrop Ave.
Hawthorne, CA 90250

P: 888.925.SEAT
F: 866.925.SEAT
E: sales@9to5seating.com



Follow us @9to5seating



©2024 9to5 Seating
LIT-C-ULF-V24 • Version 1