


# Performance 4.0

9to5<sup>®</sup>  
seating



**MOMENTUM**  
TEXTILES & WALLCOVERING

Grade C

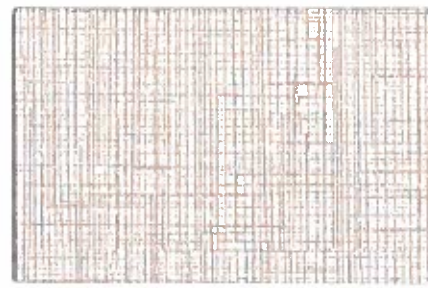

Beeline EPU Canvas



Fossil



Oriole



Portobello



Geyser



Nimbus



Forge

Grade B



Carson CV Stone



Sage



Azure



Buck



Airy



Indigo




Shadow

Grade E



Keeper CV Ash



Oak



Palm



Charcoal



Pool




Cascade



Lake

Grade F

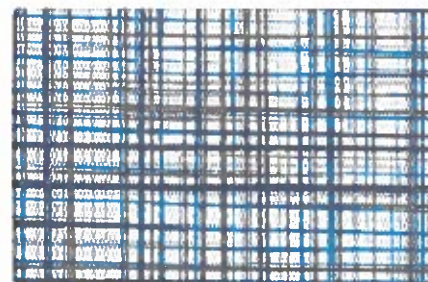

Speakeasy CV Sky



Feather



Cress



Amber



Herb



Teal



Truffle

Grade E




Caravan Bluestar



Shore



Milkweed



Ember



Granite




Cove



Shadow

Grade E

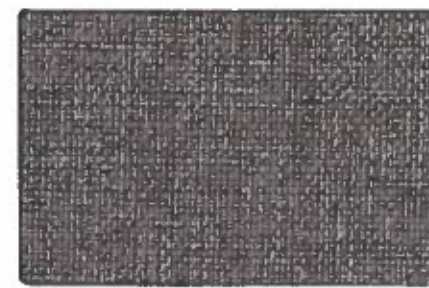

Cover Cloth Platinum



Sorrel



Cyan



Indigo



Zest



Vesper



Graphite

Grade G



Silica Leather Almond



Dove



Lichen



Shadow



Saddle



Mink



Ink

Grade D



Textura CV Shade



Thyme



Ashen



Hydra



Earl Grey



Slate



Indigo

Grade E



Promise Stucco



Moss



Surf



Atlantic



Ember




Lapis



Shale

Grade E

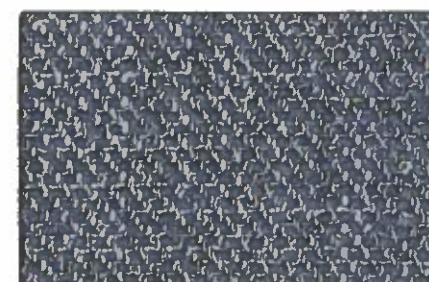

Smart Soft Cascade




Bisque



Earthen



Shale



Ash




Lapis



Ink

Grade G

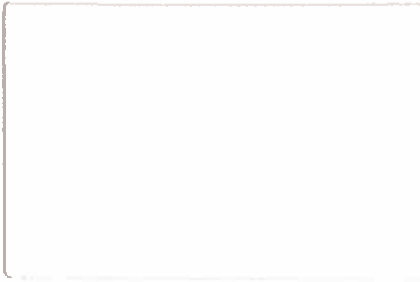

Silica Cumulus



Tropic



Quartz



Marigold



Alloy



Gallant



Nero

Grade G



Silica Suede Whelk



Desert



Hickory



Galena



Pebble



Andiron



Indigo

Grade D



Artisanal EPU Raw Sugar



Matcha



Coral



Brushed Tan



Lunar



Sky



Pthalo

Grade E



Faux Felt Pool



Pebble



Charcoal



Sprout



Vibrant



Quail



Stone

Grade D



Mixer EPU Cove



Sugar



Sunset



Clover



Haze



Tidal



Basalt

# Info

Width - Pattern	Fiber Content & Backing	Finish	Abrasion (D.R.)	Lightfastness	Approximate Repeats	Cleaning Code	Grade
54" Beeline EPU	100% EPU Polyurethane Polyester Backing		900,000	200 hours; Class 4		W Bleach Cleanable (4:1)	C
54" Carson CV	100% Clean Vinyl/Phthalate Free Polyester Backing	Protective Overcoat	500,000	200 hours; Class 4.5		W Bleach Cleanable (10:1)	B
54" Keeper CV	100% Clean Vinyl/Phthalate Free Polyester Backing	Protective Overcoat	200,000	200 hours; Class 4		WS wBleach Cleanable (10:1)	E
54" Speakeasy CV	100% Clean Vinyl/Phthalate Free Polyester Backing	Protective Overcoat	200,000	200 hours; Class 5	18-3/8" L 17-1/2" W	WS Bleach Cleanable (10:1)	F
57" Caravan	100% Polyester	Crypton®	100,000	40 hours; Class 5		WS Bleach Cleanable (10:1)	E
59" Cover Cloth	56% Repreve Post Consumer Recycled Polyester 44% Polyester	Crypton® Green	200,000	40 hours; Class 4		W Bleach Cleanable (10:1)	E
54" Silica Leather	100% Silicone Polyester Backing		210,000	200 hours; Class 4		WS Bleach Cleanable (4:1)	G
56" Smart Soft	50% Polyester 50% Recycled Polyester	Crypton®	100,000	40 hours; Class 4		WS Bleach Cleanable (10:1)	E
54" Silica Suede	70% Polyurethane/ 30% Silicone/ PVC Free Polyester Backing		500,000	200 hours; Class 5		WS Bleach Cleanable (4:1)	G
54" Artisanal EPU	100% EPU Polyurethane Polyester Backing		500,000	200 hours; Class 4.5		WS Bleach Cleanable (10:1)	D
54" Silica	100% Silicone Polyester Backing		365,000	200 hours; Class 4.5		WS Bleach Cleanable (4:1)	G
56" Faux Felt	62% Repreve Post Consumer Recycled Polyester 38% Polyester	Crypton® Green	75,000	40 hours; Class 4.5		WS Bleach Cleanable (10:1)	E
54" Mixer EPU	100% EPU Polyurethane Polyester Backing		130,000	200 hours; Class 4.5		WS Bleach Cleanable (4:1)	D
54" Promise	100% Post Consumer Recycled Polyester Acrylic Backing	Crypton®	200,000	40 hours; Class 5		WS	E
54" Textura CV	100% Clean Vinyl/Phthalate Free Polyester Backing	Protective Overcoat	200,000	200 hours; Class 4	18" L 18" W	WS Bleach Cleanable (10:1)	D



These patterns meet or exceed these ACT Performance Guidelines for upholstery.

All patterns are FR free.

## ICON UPHOLSTERY DEFINITIONS



### Fire Retardancy

Flammable testing determined as fabric's resistance to burning. PASSES - California 117



### Colorfastness To Wet & Dry Crocking

Colorfastness to wet & dry crocking refers to the rubbing off of color from the fabric onto clothing, hands or other materials and can occur under wet or dry conditions.

PASSES - AATCC 8-1974 Dry Crocking, Class 4 minimum; Wet Crocking, Class 3 minimum.

### Abrasion

Abrasion is the ability of fabric to withstand damage from wear and rub. This is a general contract specification as well as a heavy duty specification.

PASSES -



General Contact: ASTM 3579 modified (#10 cotton duck); 15,000 double rubs Wyzenbeek Method



Heavy Duty: ASTM 3579 modified (#10 cotton duck); 30,000 double rubs Wyzenbeek Method or ASTM D4966 (with 21oz. weight); 40,000 rubs Martindale Method



### Colorfastness to Light

Colorfastness to light is the degree to which fabric will retain its color when exposed to light.

PASSES - AATCC 16A-1974 or AATC 16E-1976; Class 4 minimum at 40 Hours. NOTE: Class 4 minimum at 60 hours is recommended for direct sunlight exposure situations.



### Physical Properties

3 Physical property tests include: brush pill test to determine a fabric's pilling. Breaking/tensile strength is the ability of a fabric to withstand tension without breaking or tearing. Seam slippage is the pulling apart of fabrics at the seam.

PASSES - Brush Pill ASTM D3511, 3-4 minimum. Breaking Strength ASTM D3597-D1682-64 (1975) 50 lbs. minimum in warp & weft Seam Slippage ASTM D3597-D434-75 25 lbs. minimum in warp & weft.

### Cleaning Code Definition

W: Water-based foam or cleaner.

WS: Water-based cleaning agents, foam or solvent-based cleaners may be used. CAUTION: Use of water-based or detergent-based solvents may cause spotting, shrinking and/or permanent water stains. Solvent cleaning agents will remove water stains.

BC: Bleach Cleanable. Bleach cleanability is desired for any textile that may need to be disinfected or sterilized. Refer to the above chart for exact water to bleach solution. Rinse with water after cleaning.



3211 Jack Northrop Avenue  
Hawthorne, CA 90250  
P. 888.925 SEAT F. 866.925 SEAT  
E. sales@9to5seating.com



9to5seating.com  
Follow us @9to5seating



For memo samples please contact:



**MOMENTUM**  
TEXTILES & WALLCOVERING

Toll Free 800-366-6839  
memosamples.com